

ASSARAIN CONCRETE PRODUCTS & TRADING LLC

The Company...

Assarain Concrete Products & Trading LLC, also known as ACP in industry circles, is one of the largest concrete products manufacturing companies in Oman and one of the flagship companies of Said Salem Al Wahaibi Group of Companies (earlier called Assarain Group of Companies), a group that is known for its brand and quality, all over Oman.

ACP, now leading the way as one of the largest and the best manufacturer and supplier of concrete products in Oman provides limitless customized options of many types of the following products mentioned below:



- Interlocking tiles & Building blocks
- Kerbstones & Paving Slabs
- Patterned Tiles, Roof Tiles
- Exposed Aggregate Tiles
- Shot Blasted Interlocking Tiles
- Shot Blasted Kerbstones & Paving Slabs
- Split-Face Coloured Wall System
- Split-Face House Facades
- Split-Face Block Flower Wall System
- Botanico Flower Wall System
- Tensar Wall Retaining Systems
- Play Equipment
- Led Lit Pavers
- Street Furniture
- Bollards / Litter Bins / Planters / Tree Grates
- Rubber Tiles for playgrounds / horse stables
- Autoclaved Aerated Concrete (AAC) Blocks
- Garnet Abrasives for surface preparation

A member of Said Salem Al-Wahaibi Group of Companies

Certified Integrated Management System (IMS) Company: ISO 9001:2008; 14001:2004; OHSAS 18001:2007

Best Technology:


Technology wise, ACP has the most sophisticated, latest, large and fully automatic plants from Germany, UK and Italy making different products through different plants. These are the most reputed plant suppliers of the world. ACP has also expanded its presence by setting up similar state-of-the-art mega plants in Sohar as well as in Dubai. The plant in Sohar is known as Modern Concrete Products LLC (MCP) and the one in Dubai is known as Alserkal & Assarain Concrete Products (AACP) LLC, all being part of the SSW Group of Companies.



Interlocking Tiles & Building Blocks

Dimensions in mm.


Length	Breadth	Thickness
222	110	50
222	110	60
222	110	80

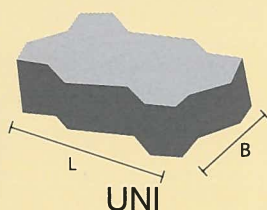

UNI

Dimensions in mm.


Length	Breadth	Thickness
200	100	60
200	100	80



Rectangular

Dimensions in mm.


Length	Breadth	Thickness
226	178	60



Tango

Dimensions in mm.

Length	Breadth	Thickness
365	390	60




Pyramid

Colour Options:



Dimensions in mm.


Length	Breadth	Thickness
227	137	60
227	137	80



Uni Décor

Dimensions in mm.


Tile	Length	Breadth	Thickness
A	198	134	60
B	198	198	60
C	194	115	60
D	80	80	60



Quadro

Dimensions in mm.


Length	Breadth	Thickness
228	135	60



Twist

Dimensions in mm.

Length	Breadth	Thickness
200	200	60




Twin

Only quality inorganic colour pigments and natural aggregates are used. Minor variation in colour and texture may occur.
This is normal and does not constitute reason for complaint.

Certified Integrated Management System (IMS) Company: ISO 9001:2008; 14001:2004; OHSAS 18001:2007


Dimensions in mm.

Length	Breadth	Thickness
310	200	60




Dimensions in mm.

Length	Breadth	Thickness
210	70	60




Dimensions in mm.

Length	Breadth	Thickness
100	100	60




Dimensions in mm.

Length	Breadth	Thickness
200	200	60
200	200	80




Dimensions in mm.

Length	Breadth	Thickness
300	300	60




Dimensions in mm.

Length	Breadth	Thickness
400	400	60




Dimensions in mm.

Length	Breadth	Thickness
300	200	80
250	200	80
200	200	80
150	200	80
100	200	80




Dimensions in mm.

Length	Breadth	Thickness
198	198	60




Dimensions in mm.

Length	Breadth	Thickness
200	200	60




Dimensions in mm.

Length	Breadth	Thickness
278	278	60




Dimensions in mm.

Tile	Length	Breadth	Thickness
A	139	139	60
B	194	194	60




Dimensions in mm.

Length	Breadth	Thickness
332	108	60




Dimensions in mm.

Tile	Length	Breadth	Thickness
A	172	115	60
B	115	115	60
C	57	115	60
D	112	115	60
E	112	86	60

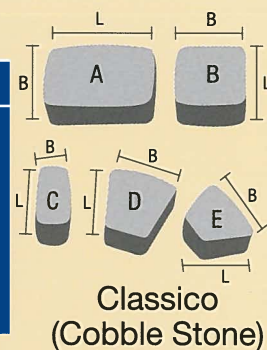

Dimensions in mm.

Tile	Length	Breadth	Thickness
A	240	160	80
B	160	160	80
C	120	160	80



Colour Options:



Only quality inorganic colour pigments and natural aggregates are used. Minor variation in colour and texture may occur.
This is normal and does not constitute reason for complaint.

Certified Integrated Management System (IMS) Company: ISO 9001:2008; 14001:2004; OHSAS 18001:2007

Interlocking Tiles - Multiple designs with enhanced aesthetics and brighter colours

- Enchanting "colour & design" combinations
- Enhanced colours using high end imported pigments
- Better surface finish
- Dense and durable products
- Higher Compressive and Flexural Strengths
- Improved corner finishes
- Uniform, closely laid pavements and floors
- Ease of laying
- Minimum wastage resulting in better savings
- No periodic rework or re-fixing
- Durable in aggressive environments
- Endures higher static loads
- Proven in areas demanding high strength, durability and chemical resistance
- Has better reflectance

Application areas:


- Roads - Side and central pavements and walkways
- Parks, Amusement Centres, Public Sit-outs, etc
- Villas and roof sit-outs
- Souqs, Hypermarkets, Theatres, Hotels & Restaurant outdoors, etc
- Port areas, Beach areas, Corniches
- Airports
- Cargo complexes
- Storage depots and industrial areas
- Warehouses
- Bridge deck sides
- Container depots
- Parking areas
- Mosques, Exhibition grounds
- Workshops
- Abattoirs
- Filling stations, etc
- Other external hard landscaping areas

Building Blocks - Better strengths and dimensional accuracy

Hollow Blocks

Dimensions in mm.


L	B	H	Comp. Strength N/mm ²	Cement
390	190	190	7.5 or 10.5	OPC or SRC
390	140	190	7.5 or 10.5	OPC or SRC
390	90	190	7.5 or 10.5	OPC or SRC

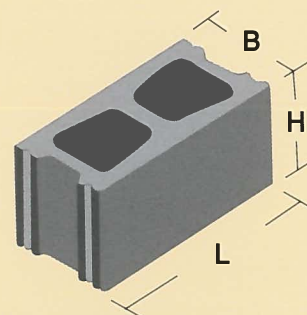

Solid Blocks

Dimensions in mm.


L	B	H	Comp. Strength N/mm ²	Cement
390	190	190	10.5	OPC or SRC
390	140	190	10.5	OPC or SRC
390	90	190	10.5	OPC or SRC



Hourdi Blocks

Dimensions in mm.

L1	L2	B	H	Cement
420	380	200	200	OPC




Kerbstones, Paving Slabs & Cable Tiles

Dense and durable Kerbstones

Dimensions in mm.


B1	B2	H1	H2	L
125	90	255	155	914
150	115	150	50	914
150	115	305	205	914
150	100	350	150	600
150	110	350	150	600
150	120	350	200	600
150	105	300	150	600
150	110	450	250	600
200	160	350	150	600
200	140	380	210	600
200	155	300	150	600

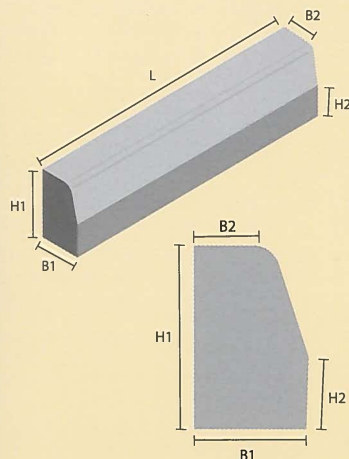

Non Mountable
Half Battered Series

Dimensions in mm.


L	B	or	B	or	B	or	B	or	B	H
914	50		75		100		125		150	150
914	50		75		100		125		150	170
914	50		75		100		125		150	200
914	50		75		100		125		150	255
914	50		75		100		125		150	305
600	150		-		-		-		-	350

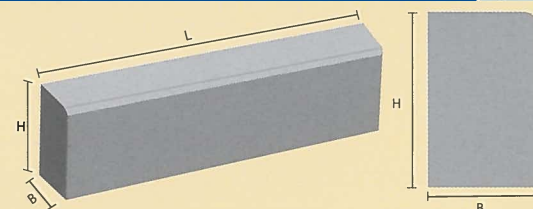

Bull Nose
Series

Dimensions in mm.


B1	B2	H1	H2	L
200	50	350	250	600
175	50	350	250	600
125	45	255	180	914

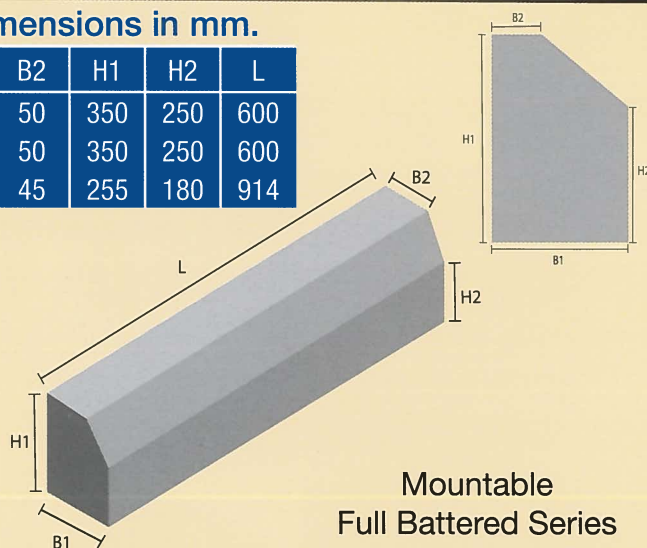

Mountable
Full Battered Series

Dimensions in mm.


L	B	or	B	or	B	or	B	or	B	H
914	50		75		100		125		150	150
914	50		75		100		125		150	170
914	50		75		100		125		150	200
914	50		75		100		125		150	255
914	50		75		100		125		150	305

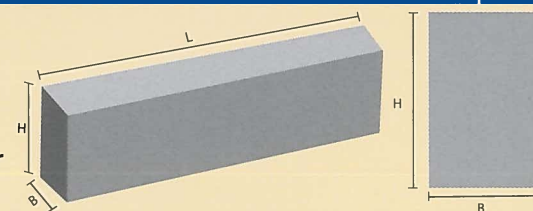


Rectangular
Series

Decorative Kerbstone Range


KA 1

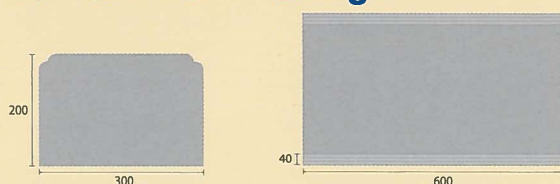


KA 2

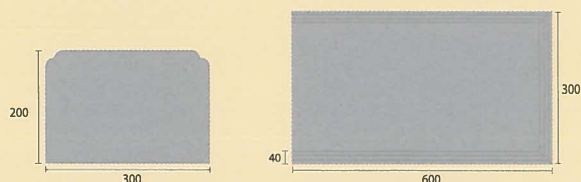

KA 3

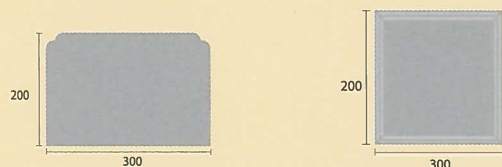


KB1

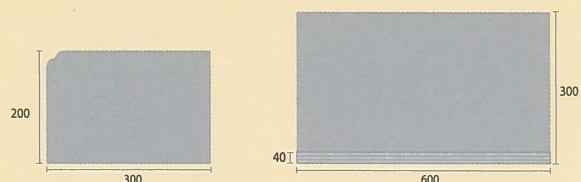

Traffic Barrier Kerb

Dimensions in mm.


L	B	H
450	200	600

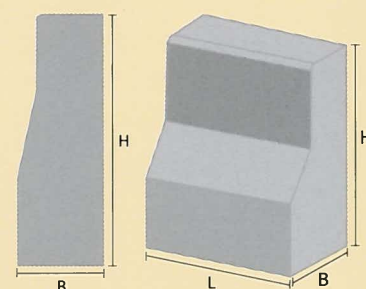


Dimensions in mm.

L	B	H
400	400	40
400	400	50
500	500	50
600	600	50

Plain Slabs



Chamfered Slabs



*Available in various colours.

* Available in smooth finish and pimple finish.

* Available in chamfer and non chamfer edges.

Patterned Tiles, Roof Tiles & Exposed Aggregate Tiles

Dimensions in mm.

Length	Breadth	Thickness
400	400	40



Riven finish




ACPT 064



ACPT 047




ACPT 113




ACPT 025




E5




E2R




E1




E 1-GR



E 2




E 2R-GR




E 16

Dimensions in mm.


Length	Breadth	Thickness
300	300	30



ACPT 137



ACPT 124




E11




E15

Dimensions in mm.

Length	Breadth	Thickness
250	250	25
300	300	28
400	400	38



White Roof Tile



Grey Roof Tile

Only quality inorganic colour pigments and natural aggregates are used. Minor variation in colour and texture may occur.
This is normal and does not constitute reason for complaint.

Certified Integrated Management System (IMS) Company: ISO 9001:2008; 14001:2004; OHSAS 18001:2007




Shot Blasted Interlocking Tiles



Shot Blasted Kerbstones



Shot Blasted Coloured Paving Slabs

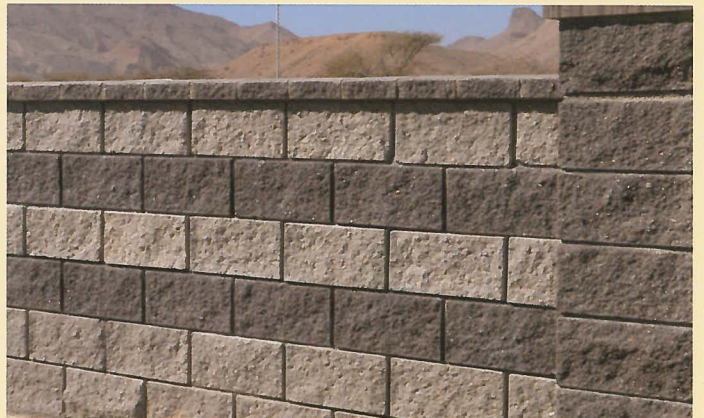

Split-Face Boundary Wall Systems



Split Block Flower Wall System



Botanico Walls



Split-Face Coloured Garden Features



Split-Face Coloured House Facades

Only quality inorganic colour pigments and natural aggregates are used. Minor variation in colour and texture may occur.
This is normal and does not constitute reason for complaint.

Certified Integrated Management System (IMS) Company: ISO 9001:2008; 14001:2004; OHSAS 18001:2007


Other Value Added Products



Tensor Wall Retaining Systems



Play Equipment

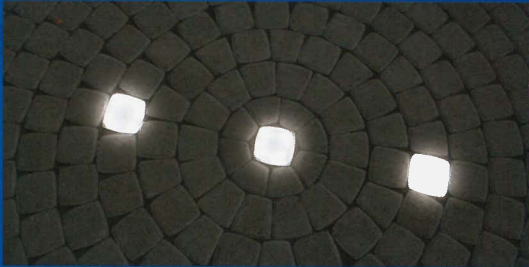

Led Lit Pavers



Rubber Tiles for playgrounds




Rubber Tiles for Horse stables



Benches/Bollards/Litter Bins/Planters/Tree Grates



Autoclaved Aerated Concrete (AAC) Blocks

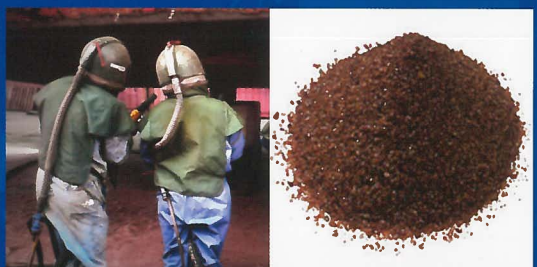

Garnet Abrasives for surface preparation

Blending Trust with Quality.....



Assarain Concrete Products & Trading L.L.C.

(A member of Said Salem Al-Wahaibi Group of Companies)

PO Box 971, C.P.O. Seeb, PC 111, Sultanate of Oman. Sales Showroom: Madinat Sultan Qaboos, Tel.: 24605986, 24694321, Fax: 24695957
Tel: (Factory) 24437636 / 24437356 Fax: 24437175 - Despatch: 24437717 / 99437504 Email: acpllc@assarain.com

An ISO 9001:2008, ISO 14001:2004 & OHSAS 18001:2007 certified Company

